

# 510-0350 PKE Module/Controller (Unsealed)



TriMark's e-ASK systems consist of a selection of compatible components that allow for complete keyless entry for on and off-highway vehicle applications

## **DESIGNED FOR:**

- Unsealed controller to work with TriMark's Passive Keyless Entry System
- Incorporation into TriMark mechanical latches and handles by providing keyless entry, security and convenience for access door systems through a RF remote fob electronics
- SAE J1939 at 250K/500K/1M or RVC to enable communications with other modules
- Ability to "wake on CAN" messages allows power saving mode

## **Global Locations:**

**TriMark Corporation**  
500 Bailey Avenue  
P.O. Box 350  
New Hampton, Iowa 50659  
United States  
Tel: 641-394-3188  
Fax: 641-394-2392  
1-800-447-0343  
www.trimarkcorp.com

**TriMark Europe**  
Unit 3  
Sence Court  
Bardon Hill  
Coalville LE67 1GZ  
United Kingdom  
Tel: +44(0)1530 512460  
Fax: +44(0)1530 512461  
www.trimarkeu.com

**TriMark (Xuzhou)**  
Building A5 Jingwu Road  
Xuzhou Economic  
Development Zone  
Xuzhou, Jiangsu  
221004 PR China  
Tel: +86 516 8773 0018  
Fax: +86 516 8773 0058  
www.trimarkcn.com



TriMark. Interactive. Product. Selector



TriMark



TriMark Corporation




TriMark Corporation



# 510-0350 PKE Module/Controller (Unsealed)

## FEATURES/BENEFITS:

- 12V DC operation
- Low Power consumption mode draws 4.5mA of electrical current in deep sleep mode
- SAE J1939 at 250K/500K/1M or RVC to enable communications with other modules
- Software adaptable to OEM specific requirements
- Ability to wake other vehicle controllers via CAN
- 6 configurable (High or Low) inputs
- 9 Low inputs
- 10 Low side outputs (500mA)
- 13 (15) Amp relays
- 433 MHz Radio Frequency (RF) communication with key fobs (range up to 50m)
- Ability to control more than 10 different functions via key fob (including CAN messages)
- 125 KHz Low Frequency (LF) communication with Fobs that enables passive entry, push to start, and immobilization functions
- Up to 2 exterior doors can utilize passive entry
- Up to 3 LF antennas can be utilized for fob detection. These are configurable and can be used for exterior for entry, or interior for immobilization
- LF/RF communication handshakes preventing security threads

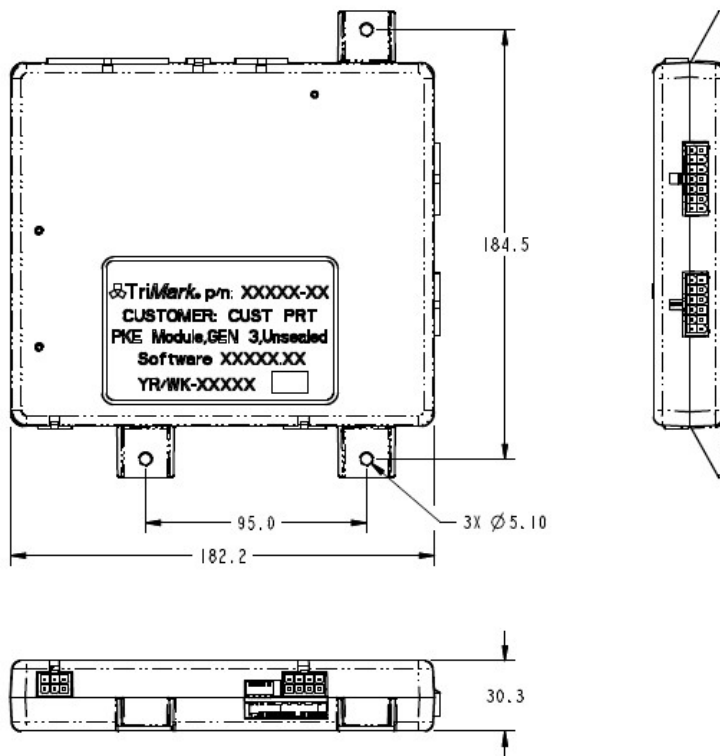

## AVAILABLE:

- Unsealed enclosure with AMP/VAL-U-LOK connectors

## USE WITH:

- TriMark 500-1350 e-ASK PKE System (Unsealed)
- TriMark 530-0400 PKE e-FOB
- TriMark 590-1200 PKE Antenna
- TriMark Capacitive sense enabled products
- TriMark 550-0100 Power Lock Compact Actuator
- TriMark 540-0100 e-PAD Keypad
- TriMark 540-0200 e-GRAB Handle

## INSTALLATION:

- I/O module is easily installed with (3) M4 screws (not included) and can be mounted in a concealed location

**US Patent No. 8,350,669 / 8,976,014 / 10,385,594 / 10,909,785**

**U.S. Design Patent No. D907,589**

Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.

**Open-Source Software:** This product may contain embedded software from open-source communities. The open-source software (OOS), copyright, licensing terms and conditions are located at the following [link](http://www.trimarkcorp.com).

For more information visit  
[www.trimarkcorp.com](http://www.trimarkcorp.com)

