


30-900 Motor Home Entrance Door Hardware With Dead Bolt



Designed for door applications that require a rotary-type latching mechanism

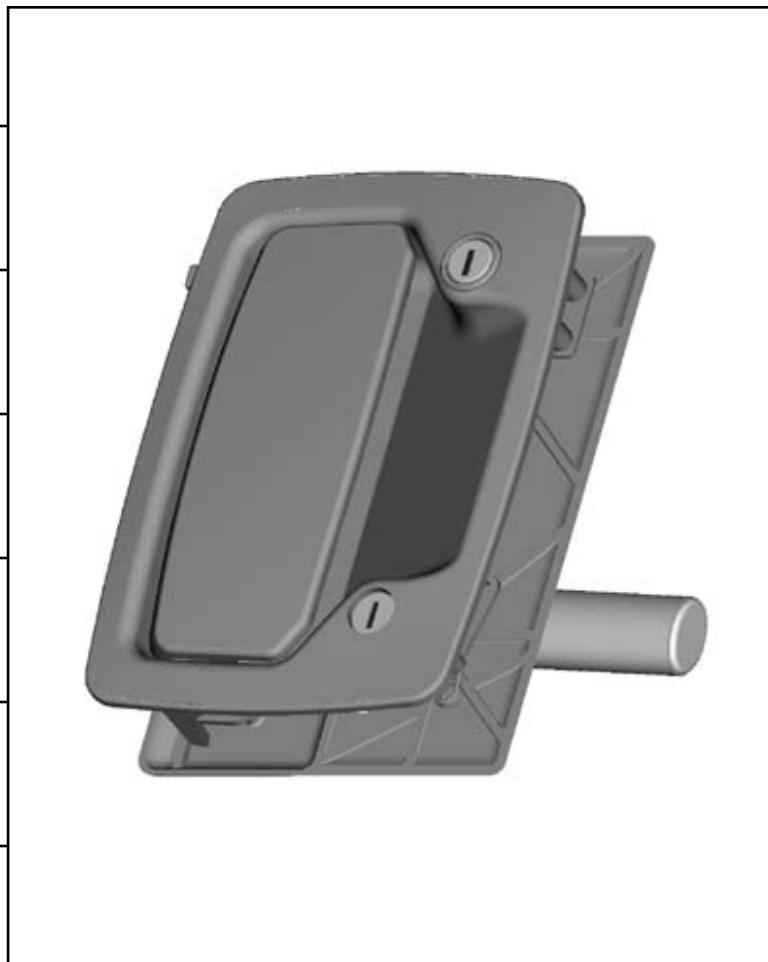

500 Bailey Avenue
New Hampton, Iowa 50659
Tel: 641-394-3188
Fax: 641-394-2392
1-800-447-0343
www.trimarkcorp.com

ISO 9001
United States



TriMark Europe

Magna Road, South Wigston
Leicester LE18 4ZH
United Kingdom
Tel: +44(0)116-278-7516
Fax: +44(0)116-277-6640

ISO 9002
Europe



30-900 Motor Home Entrance Door Hardware With Dead Bolt

DESIGNED FOR:

- Motor home entrance doors with thickness of 1-1/2" or 1-7/8"
- Fifth-wheel trailers and motor homes
- Applications requiring resistance to water and dirt infiltration
- Door seal pressures of 25 lbs. or less for ease of function and maximum life (not to exceed 50 lbs.)
- Right hand applications
- Door weights up to 75 lbs.

FEATURES/BENEFITS:

- Automotive style latch mechanism
- Smooth opening/closing action
- Positive latching
- Paddle can be locked before door is shut
- Paddle is rigid when locked
- Automotive styling
- Comfortable finger access
- Inside handle for easy closing
- Adaptable for power door lock actuator
- Built-in dead bolt eliminates the need for an add-on residential type dead bolt
- Dead bolt locks into the fully extended position for true dead bolt functioning

USE WITH:

- TriMark 70-100 .500 Diameter Striker Bolt
- TriMark 100-410 Cage Nut

AVAILABLE:

- Master keyed passage lock key cylinder.
- Non-master keyed dead bolt
- Gasket (not included)
- KeyOne™
- KeyOne™ Plus


MATERIAL:

- Housing, inside plates, paddles, and certain lock actuating components: die cast zinc alloy
- Internal latch components: heat treated, smooth edge stamped steel
- Springs: non-corrosive stainless steel
- Case halves: high strength steel


U.S. Patent No. 4,736,972 & 5,127,686

Canadian Patent No. 2045831

Design Patent No. 339,049 & 339,050

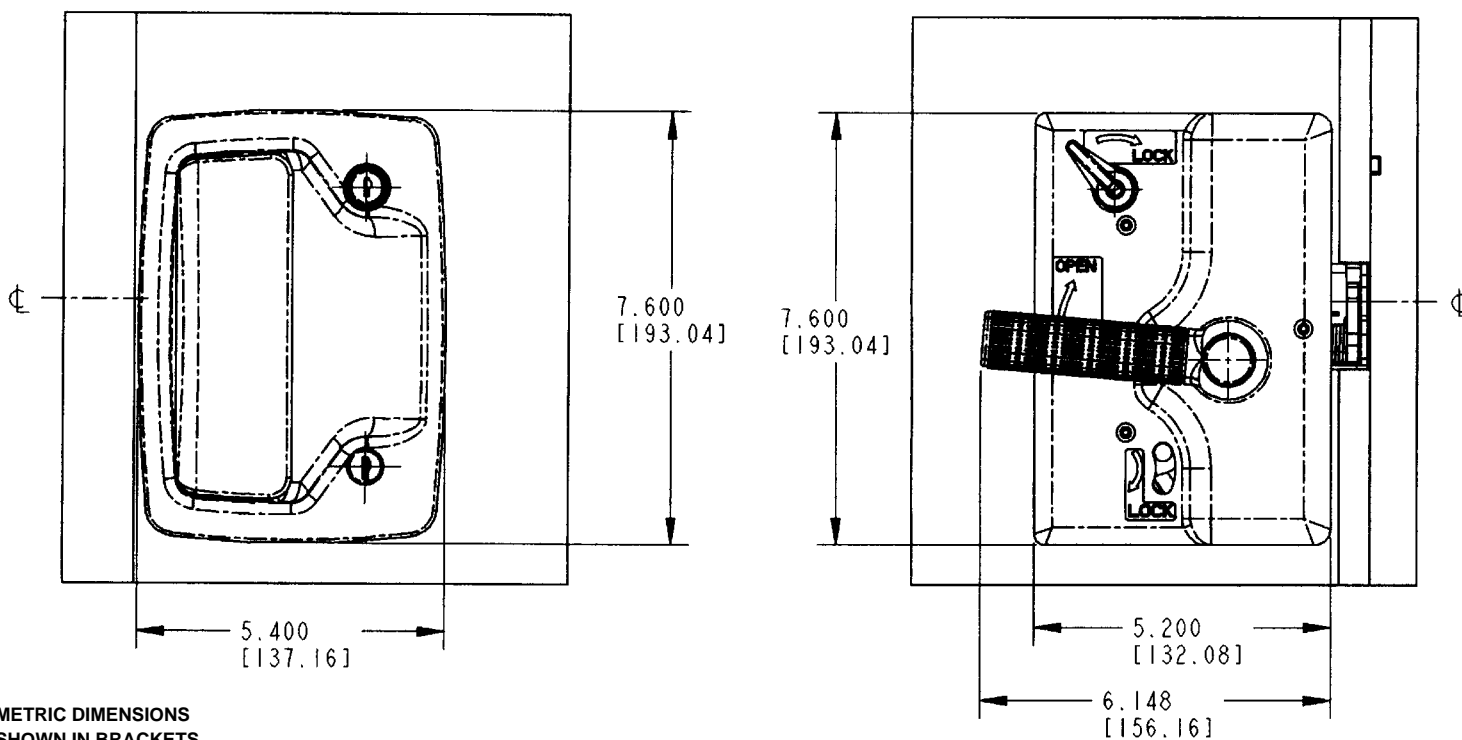

30-900 Motor Home Entrance Door Hardware With Dead Bolt

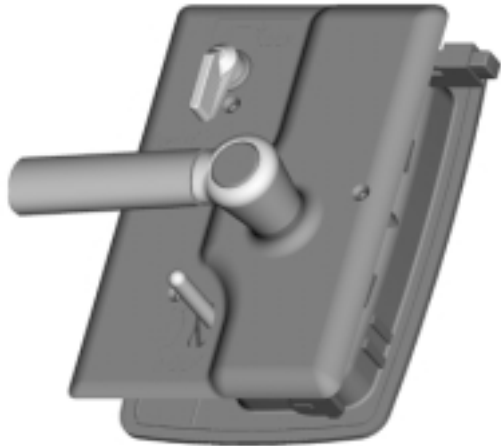

FINISH:

- Black powder coated
- Chrome plated
- Interior release: white powder coat

INSTALLATION:


- #8-32 UNC mounting screws (not included). Recommended torque 13 in./lbs.
- Sandwich mount installation does not require any linkage rods

Meets FMVSS 206 load requirements and may be used in FMVSS 206 applications pending TriMark application approval.

Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.



KeyOne™ and KeyOne™ Plus are available. The KeyOne™ system allows the operation of multiple on board locking hardware with a single key. KeyOne™ Plus features include a reversible key for ease of operation and a larger body diameter for enhanced security. Please call for more information.

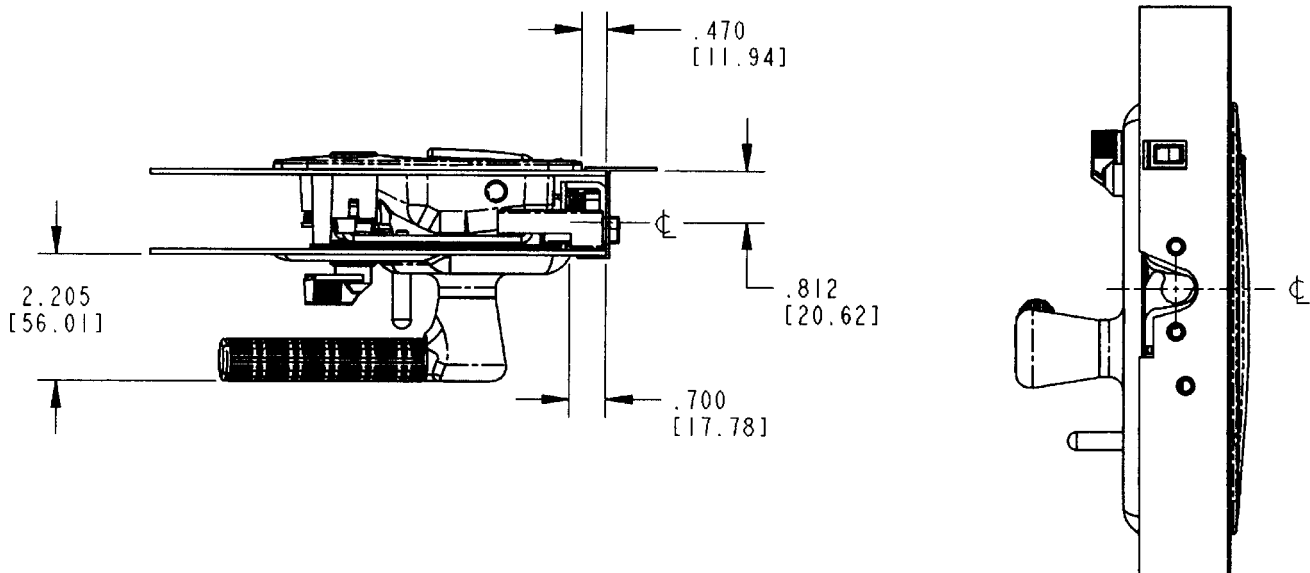

METRIC DIMENSIONS
SHOWN IN BRACKETS