

040-0500
120mm Push
Button Handle



DESIGNED FOR:

- On or off-highway vehicle applications
- Push button handles requiring 120mm mounting

FEATURES/BENEFITS:

- Frictionless pushbutton seal
- Flow through self-cleaning design
- Readily adaptable to a variety of door thicknesses with an adjustable bolt and nut (option -CC)
- Full gloved hand clearance
- .625" (15.88mm) button travel
- Exterior push button surface mount
- Button locks rigid when locked
- Snap-in retainer side plates allow for alternate color and/or customer branding
- Retrofittable with most European push buttons
- Easy to operate (ergonomics)

Global Locations:

TriMark Corporation
500 Bailey Avenue
P.O. Box 350
New Hampton, Iowa 50659
United States
Tel: 641-394-3188
Fax: 641-394-2392
1-800-447-0343
www.trimarkcorp.com

TriMark Europe
Cedar Court
Walker road
Bardon Hill
Coalville LE67 1TU
United Kingdom
Tel: +44(0)1530 512460
Fax: +44(0)1530 512461
www.trimarkeu.com

TriMark (Xuzhou)
Building A5 Jingwu Road
Xuzhou Economic
Development Zone
Xuzhou, Jiangsu
221004 PR China
Tel: +86 516 8773 0018
Fax: +86 516 8773 0058
www.trimarkcn.com



TriMark. Interactive. Product. Selector



TriMark



TriMark Corporation

AVAILABLE:

- Can be keyed alike with most single and reversible key systems
- With adjustable bolt
- In locking or non-locking configurations

MATERIAL:


- Handle: glass reinforced nylon
- Brass threaded inserts

INSTALLATION:

- Installed with (3) M6x1 bolts (not included)
- Mounts against glass with only two holes
- Recommended mounting fastener torque to be 5.6-6.7 N-m (50-59 lbf-in)

For more information visit
www.trimarkcorp.com

Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.

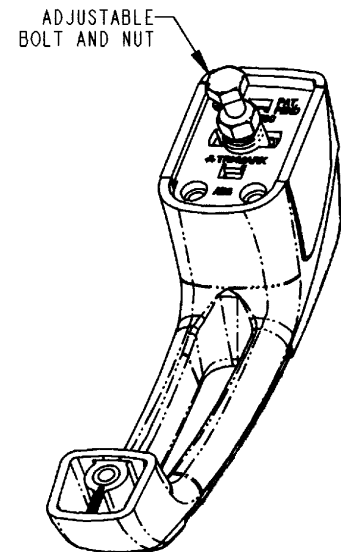

OPTION CC

