

# 100-7100 Caraloc Door Set



Specifically designed for light duty entrance and compartment doors, this complete door set provides exterior paddle handle and plunger latch with L handle inside release in a compact, back-to-back configuration.

## Global Locations:

**TriMark Corporation**  
500 Bailey Avenue  
P.O. Box 350  
New Hampton, Iowa 50659  
United States  
Tel: 641-394-3188  
Fax: 641-394-2392  
1-800-447-0343  
[www.trimarkcorp.com](http://www.trimarkcorp.com)

**TriMark Europe**  
Cedar Court  
Walker road  
Bardon Hill  
Coalville LE67 1TU  
United Kingdom  
Tel: +44(0)1530 512460  
Fax: +44(0)1530 512461  
[www.trimarkeu.com](http://www.trimarkeu.com)

**TriMark (Xuzhou)**  
Building A5 Jingwu Road  
Xuzhou Economic  
Development Zone  
Xuzhou, Jiangsu  
221004 PR China  
Tel: +86 516 8773 0018  
Fax: +86 516 8773 0058  
[www.trimarkcn.com](http://www.trimarkcn.com)



TriMark. Interactive. Product. Selector



TriMark



TriMark Corporation



TriMark Corporation


### FEATURES/BENEFITS:

- Sturdy, narrow width, low profile exterior paddle handle can be used in various orientations
- KeyOne Plus allows for single keying option with wide variety of key coding available
- Kitted with a variety of available interior plunger latch mechanisms and L-handle inside releases



### AVAILABLE:

- Choice of low-profile L handle or large L handle inside release
- Supplied with various base plate configurations to accommodate door thickness from 25mm (.98") to 36mm (1.97")
- Lock can be keyed to match other TriMark door products with KeyOne Plus for a single-key system, keyed alike or provided non-locking

For more information visit  
[www.trimarkcorp.com](http://www.trimarkcorp.com)

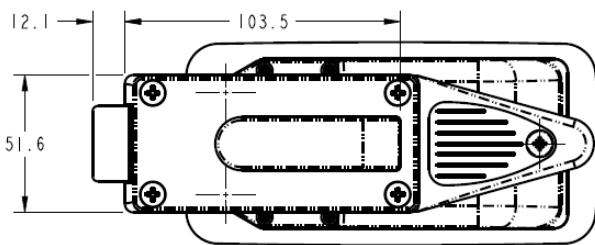

060-7100 HANDLE

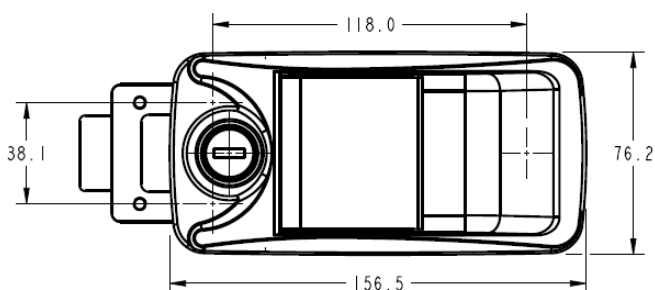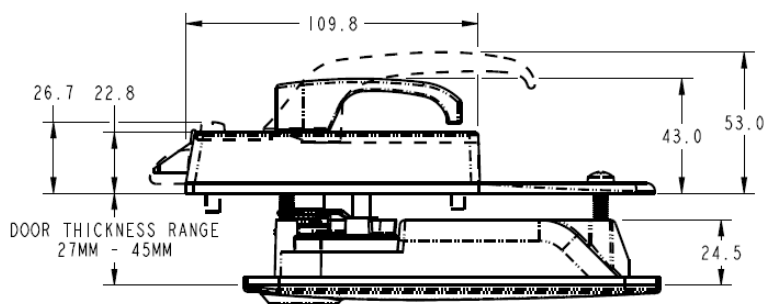

### MATERIAL:

- Sturdy zinc die-cast alloy paddle/latch housing, paddle, L handle and plunger
- Paddle actuator: Glass filled nylon or zinc die cast

### FINISH:


- Paddle handle/latch/L handle: Standard black or silver powder-coated. Other color options available upon request

### INSTALLATION:

- Easy to install using provided fixings, base plates and gasket
  - ◇ Paddle handle - (3) 5mm fixing screws (included). Recommended mounting fastener torque not to exceed 6 N-m (50 lbf-in)
  - ◇ Latch/L handle - (4) M5 fixing screws (included). Recommended mounting fastener torque not to exceed 6 N-m (50 in-lbs)

Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.

**Caution:** Product does not meet FMVSS 206 (ECE R11) load requirements.

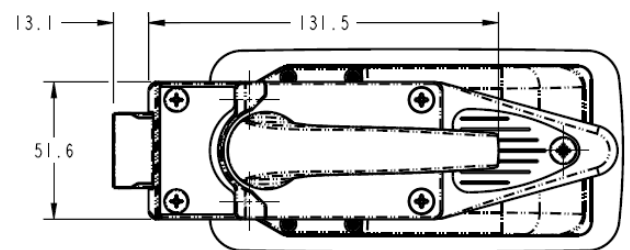

060-7200 HANDLE

