
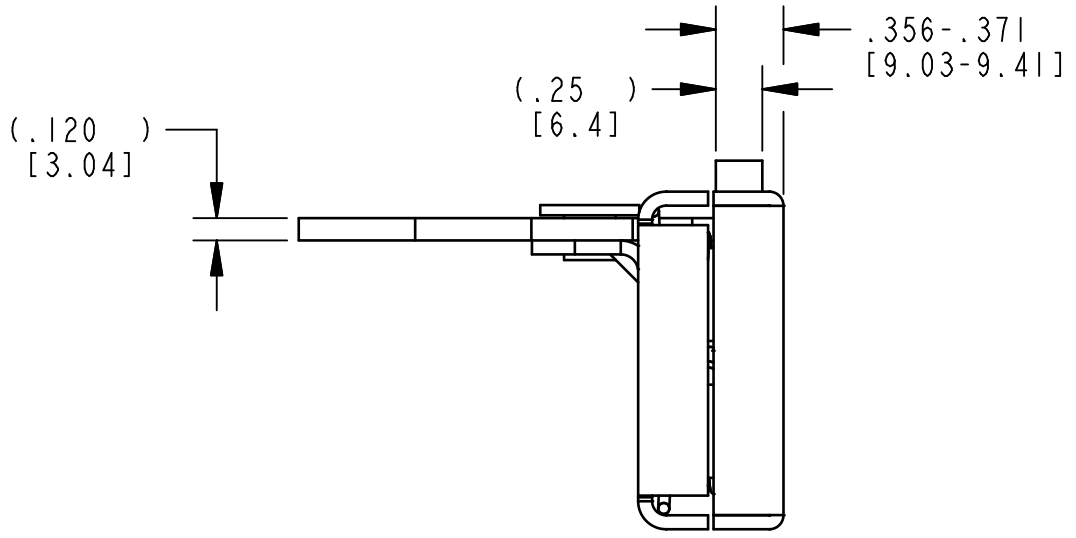


- NOTES:
- 1 ASSEMBLY IDENTIFIED WITH PART NUMBER AND DATE CODE, APPROXIMATELY AS SHOWN, OR IN OTHER APPROVED LOCATIONS AS OUTLINED IN ES-121. ORIENTATION OF THE RIVET CONTAINING PART NUMBER AND DATE CODE NOT IMPORTANT.
  - 2. ASSEMBLY COMPLIES WITH STRENGTH REQUIREMENTS OF SAE STANDARD J839.
  - 3. TIGHTEN MOUNTING FASTENERS TO THE FASTENER MANUFACTURER'S RECOMMENDED TORQUE VALUE; HOWEVER, DO NOT EXCEED 120 IN-LBS [13.6N-m].
  - 4. WHEN MOUNTING LATCH, MOUNTING HOLE SIZE NOT TO EXCEED Ø.312 [7.92].
  - 5. DIMENSIONS IN [ ] ARE IN MILLIMETERS FOR REFERENCE ONLY.
  - 6. USE WITH TRIMARK'S Ø.675 [17.15] STRIKER BOLT.
  - 7 CONTACT TO RELEASE POSITION APPROXIMATELY 5.0°.
  - 8 CONTACT TO MAX TRAVEL APPROXIMATELY 8.8°.

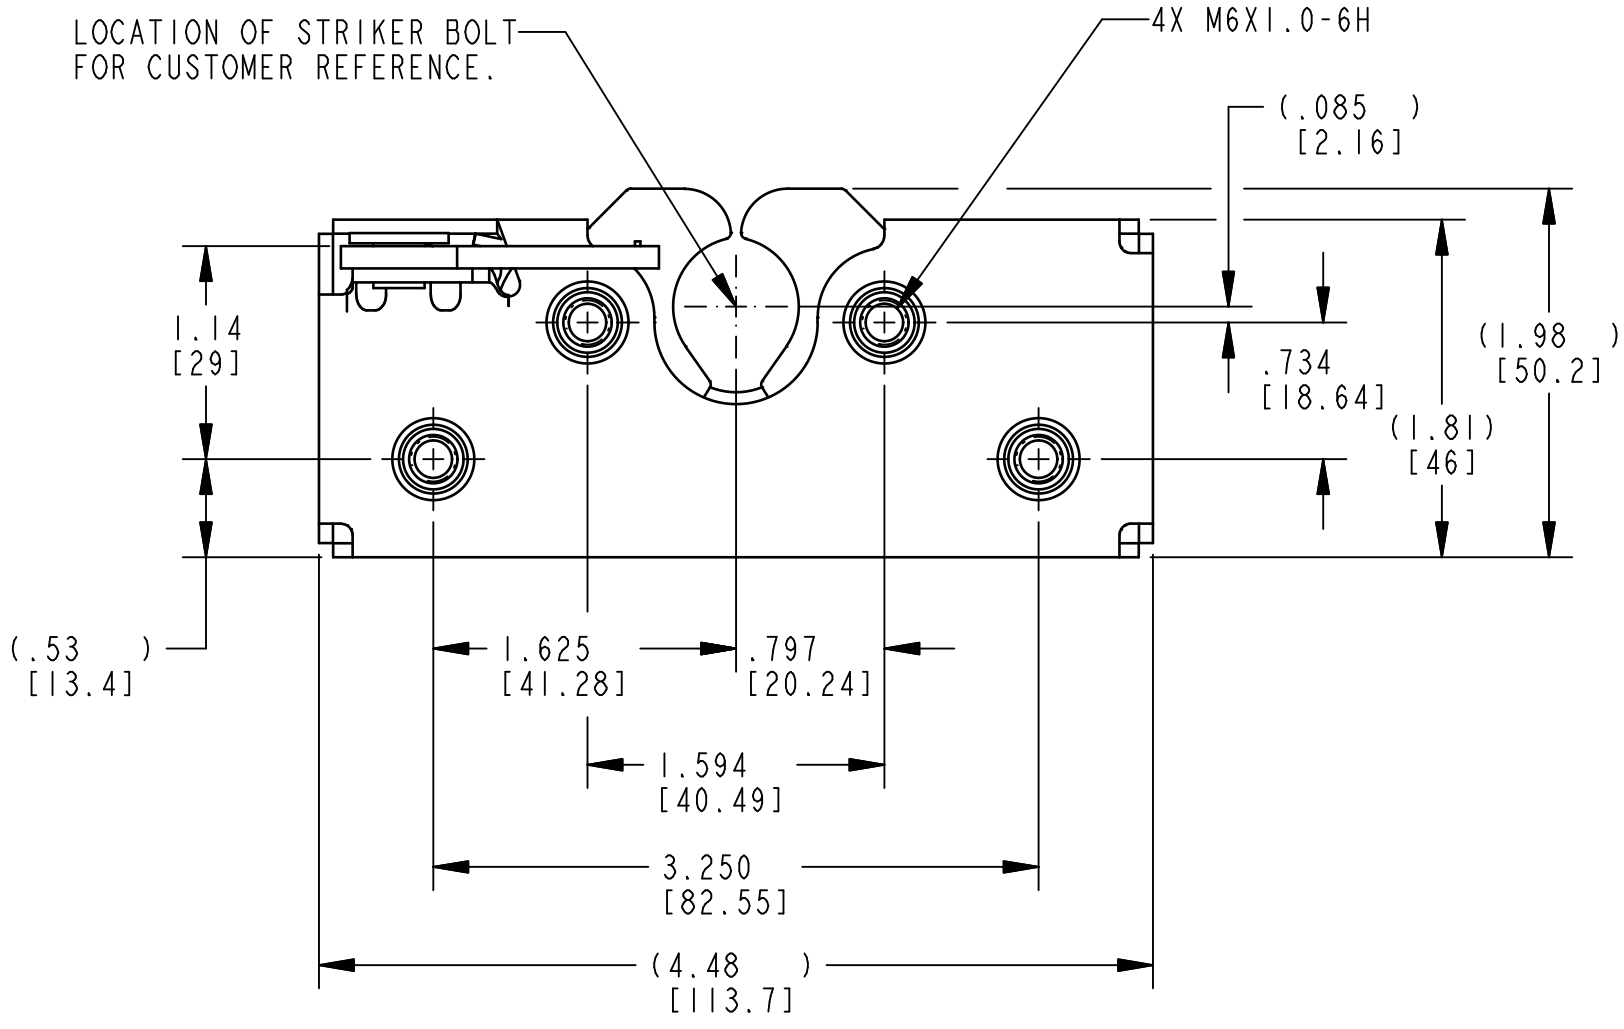

**PRODUCT SUPPORT DRAWING**  
 Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions and specifications.

SPECIFICATION	DESCRIPTION	ITEM	PART NUMBER	DESCRIPTION	QUANTITY
DRAWN BY MLH 4/25/02	MATERIAL				
CHECKED BY JRS 4/25/02	HEAT TREAT				
DESIGN ENG. GCL	FINISH				
MFG. ENG.	PROJECT	CUSTOMER	CUSTOMER PART NUMBER		
QUALITY ENG.	SIZE	PART WEIGHT	SURFACE AREA	PRODUCT CODE	
<b>TOLERANCES UNLESS OTHERWISE SPECIFIED</b> ASME Y14.5M-1994 DIMENSIONS ANGLES X.X ±.1 X° ±3° X.XX ±.03 X.X° ±1.0° X.XXX ±.010 X.XX° ±.50°		REPORT ERRORS TO ENGINEERING DEPARTMENT DO NOT SCALE DRAWING		SCALE FULL REVISION A PART NUMBER PRI8610	
500 Bailey Avenue New Hampton, Iowa 50659 U.S.A. Tel: 641-394-3188 Fax: 641-394-2392					
This drawing and the information contained herein is the property of TriMark Corporation and shall not be used for any purpose without our written consent.					
<b>PART NAME</b> DBLRTR, LH, 6MM, 2PT					